



Applications:

Refrigeration equipment and refrigeration recovery equipment.

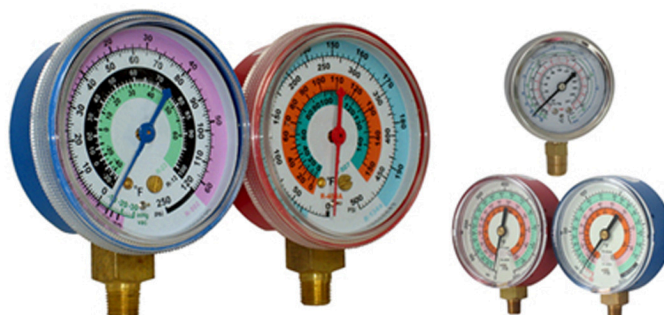

Specifications:

■ Dial	2.5"(63mm),4"(100mm),6"(150mm)
■ Case	Painted Steel / Red & Blue Plastic
■ Lens	Glass / Acrylic / Polycarbonate
■ Ring	st/st/crimped / Polished brass / Painted Steel
■ Internal	Brass
■ Connection	1/4" or 1/8" NPT
■ Range	30"-0-120 PSI(Retard 250),30"-0-300 PSI,0-500 PSI
■ Accuracy	±1.0% or ±2.0%

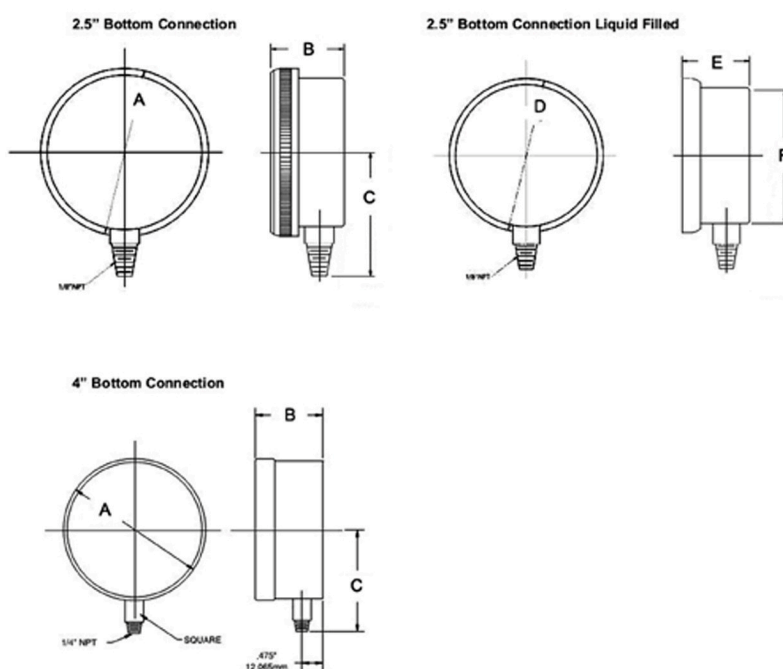

Dial	A	B	C	D	E	F
2.5" (63mm)	2.850" (72.390mm)	1.250" (31.75mm)	2.100" (53.340mm)	2.725" (69.21mm)	1.250" (31.75mm)	2.500" (63.50mm)
4" (100mm)	3.950" (100.33mm)	1.400" (35.56mm)	2.950" (74.93mm)			