


## Applications:

Used in Plumbing, heating, air conditioning, pneumatic, hydraulic, water tanks, air compressors, OEM



## Specifications:

■ Dial	1.5"(40mm),2"(50mm),2.5"(63mm),4"(100mm)
■ Case	Black Plated Steel / Plastic
■ Lens	Glass / Acrylic / PC
■ Ring	Painted Black steel / Chrome plated steel
■ Internal	Brass or stainless steel
■ Connection	Brass or St/St, 1/2" or 1/4" NPT
■ Range	30"Hg.Vac./kpa -- 0-5000 Psi/Kpa
■ Accuracy	±3-2-3%

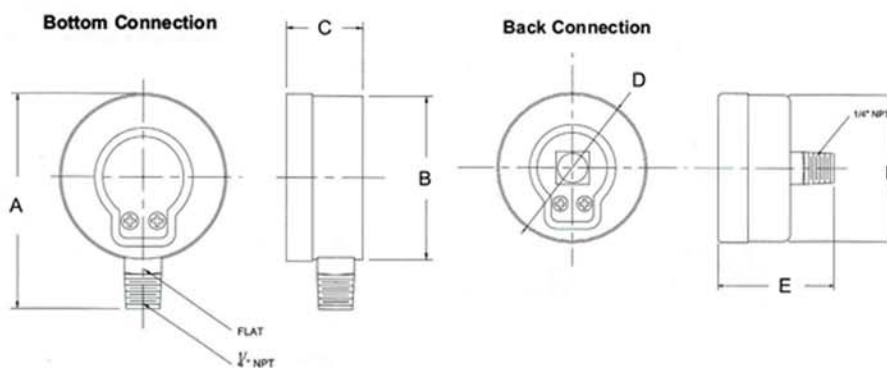

Dial	A	B	C	D	E	F
1.5" (40mm)	2.300" (58.4mm)	1.617" (41.0mm)	1.000" (25.4mm)	1.660" (42.1mm)	1.515" (38.5mm)	1.620" (41.1mm)
2" (50mm)	3.012" (76.40mm)	2.118" (53.8mm)	1.142" (29.0mm)	2.070" (52.5mm)	1.875" (47.6mm)	2.020" (51.3mm)
2.5" (63mm)	3.189" (81.0mm)	2.441" (62.0mm)	1.102" (28.0mm)	2.500" (63.4mm)	1.850" (47.0mm)	2.421" (61.5mm)
4" (100mm)	4.900" (124.4mm)	3.843" (97.5mm)	1.460" (37.1mm)			