


## Applications:


Widely specified in the industrial and commercial plumbing trade, 9" (230mm) aluminum or thermoplastic case with a separable thermowell, vari-angle connection and a 360 degrees case rotation for easy installation. Used in plumbing, water lines, boilers, heating, air conditioning and ventilation.

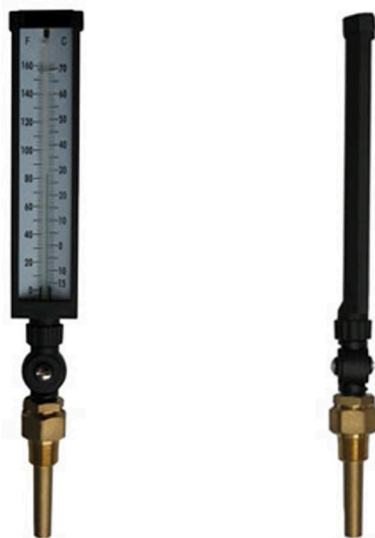


## Specifications:

■ Dial	5"(155mm),9"(230mm)
■ Case	Black impact resistant thermoplastic / Aluminum
■ Liquid Filling	Organic Liquid / Blue / Red
■ Stem	3.5"(90mm), 6"(160mm)
■ Adjustment	Fully Adjustable
■ Connection	3/4" NPT with thermowell / 1 1/4"UNF swivel nut (no thermowell)
■ Range	-40-110F/C,0-120F/C,0-160F/C, 30-180F/C,30-240F/C,30-300F/C
■ Accuracy	±1.0%

3.5" Stem

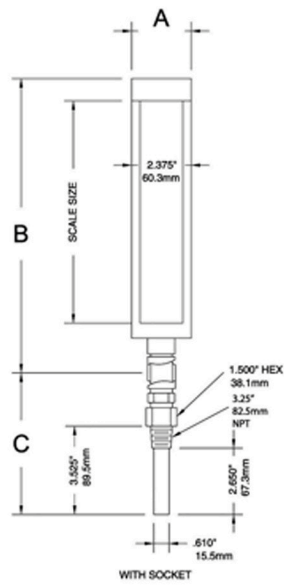

6" Stem

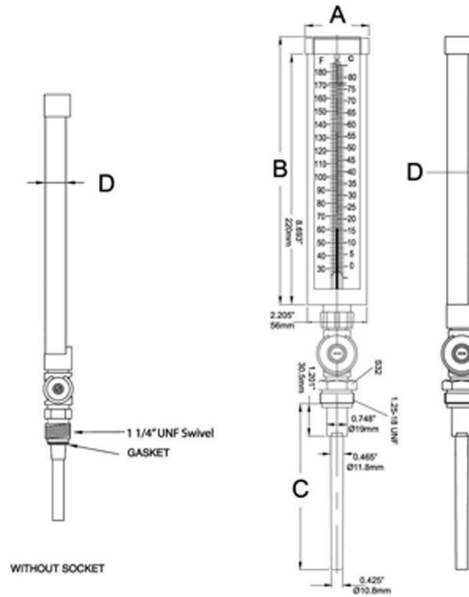

Stem	A	B	C	D
3.5" (90mm)	2.375" (60.3mm)	11.750" (298.2mm)	5.650" (143.4mm)	0.825" (20.9mm)
6" (150mm)	2.362" (60.0mm)	9.921" (252mm)	6.142" (156mm)	0.795" (20.2mm)